



# TRAILER DOLLY

WITH **PLASTIC HUB WHEELS**  
INSTRUCTION MANUAL



67279

## CONTENTS

Specs .....	3
Parts Diagram .....	4
Assembly .....	5

## TOOLS NEEDED

- Needle Nose Pliers
- Box Cutters / Utility Knife
- Wrenches: 1/2" & 2"
- Sockets: 1/2"

## MADE IN THE USA GUARANTEE



Our American made products are engineered, manufactured and assembled in Archbold, OH using USA made steel.



*Expect more. get more.*  
FROM GRANITE INDUSTRIES

- Exceptional quality and service on every single product.
- Professional grade designs by our in house engineers.
- Industry leading warranties.
- Family owned and operated in the USA.

To view more products from  
American Cart & Rack  
scan the QR code with your phone  
or visit [AmericanCartAndRack.com](http://AmericanCartAndRack.com)



## WARRANTY

3 Year Limited Warranty. Carts, excluding any finishes, casters and wheels are warranted for three (3) years from date of original purchase. Casters and wheels are warranted for 90 days from date of original purchase. We will repair, without charge, any defect due to faulty material or workmanship. These warranties do not cover failures due to abuse, misuse, improper installation, accidental damage or when repairs or modifications have been made or attempted to be made by anyone other than Granite Industries. Any defective products that meet warranty specifications and Granite Industries approval, may be returned to the factory to be repaired or replaced free of charge. (Granite Industries will pay to ship replacement item(s) to the customer; however the customer is responsible for shipment of products to the factory.) This remedy is the sole remedy in contract, tort or otherwise, and Granite Industries is not liable for incidental, consequential or special damages. These warranties give you specific legal rights, and you may have other rights which vary from state to state. Should you have any questions, contact Granite Industries (Proof of purchase may be required).





**GRANITE  
INDUSTRIES**

**Customer Service**

**877-447-2648**


**M-F, 8am - 5pm EST**

## SPECS

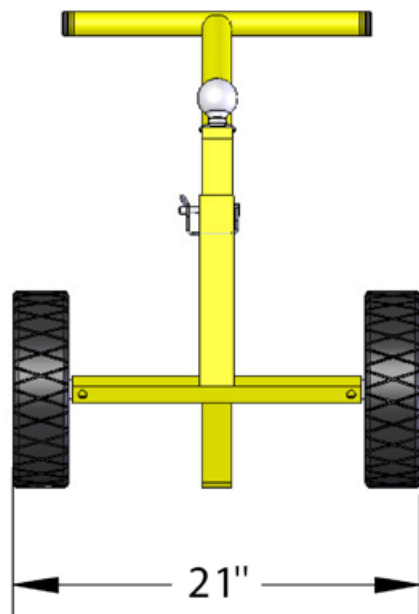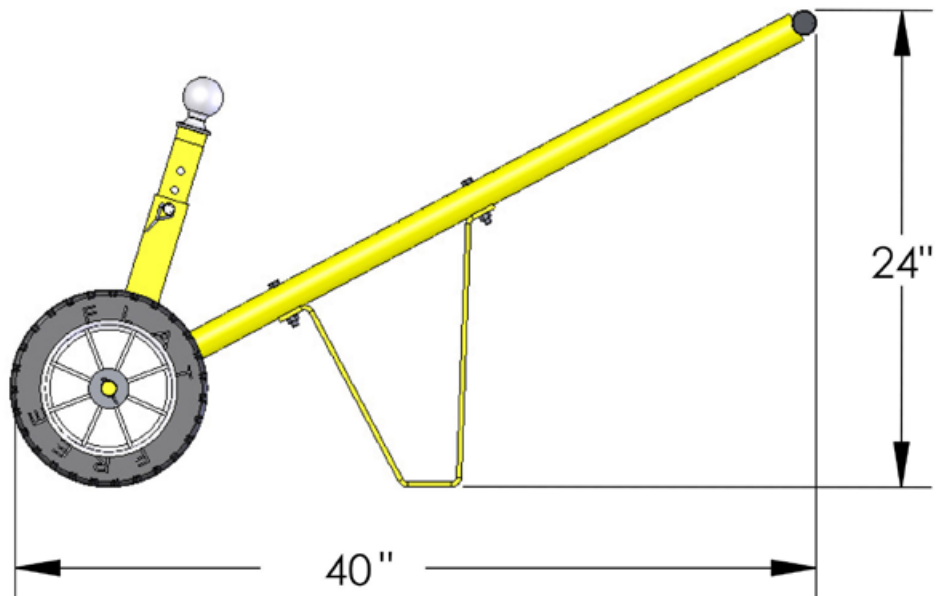

<b>Overall Dimensions:</b>	<b>W:</b> 21"	<b>D:</b> 40"	<b>H:</b> 24"
<b>Weight:</b>	23 lbs.	<b>Tongue Weight:</b>	500 lbs.

## PARTS DIAGRAM

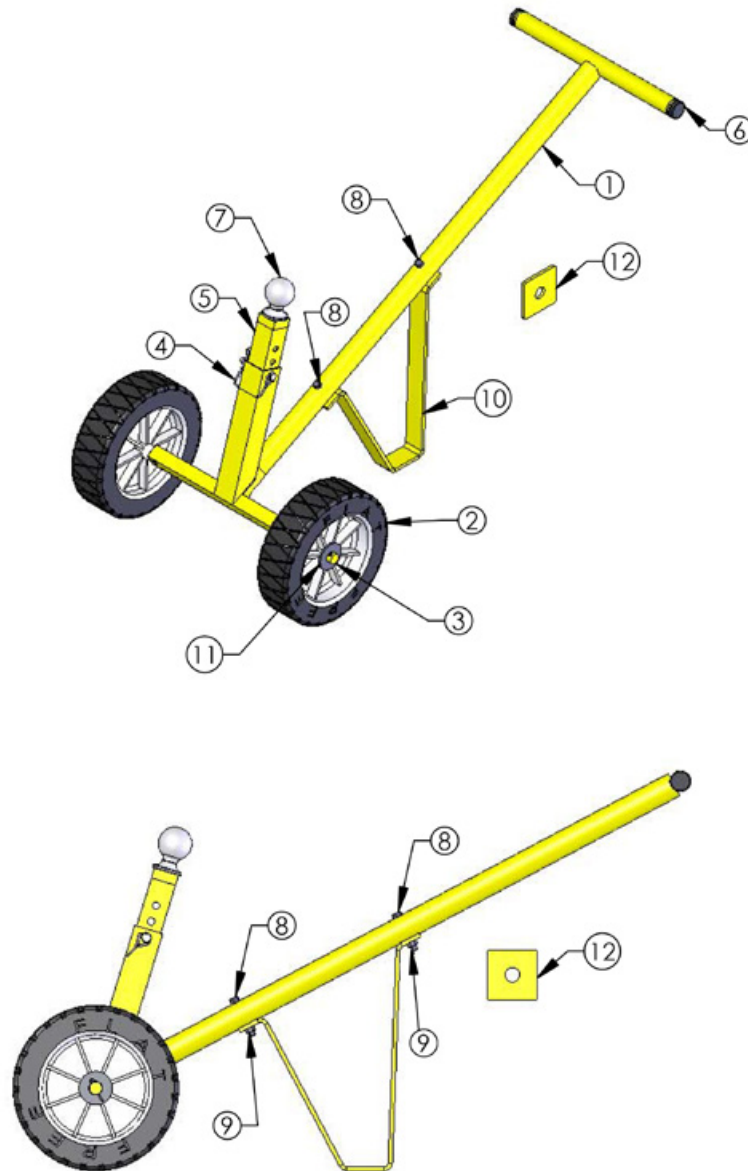

ITEM NO	QTY	PART NO	DESCRIPTION	
1	1	MI-12-5010	Cart Body	
2	2	PI-06-0032	10" Plastic Hub Wheel	
3	2	PI-01-0226	1-1/4" Cotter Pin	
4	1	06003	2" Snap Pin	
5	1	MI-12-0791	Extension Post	
6	2	PI-04-0036	1 1/4" Cap	
7	1	PI-11-0012	2" Trailer Ball	
8	2	PI-01-0120	5/16" Hex Bolt (2-1/4" L)	Use 1/2" Wrench/Socket
9	2	PI-01-0017	5/16" Lock Nut	Use 1/2" Wrench/Socket
10	1	MI-03-1783	Rear Leg / Bar	
11	2	PI-01-0451	3/4" Washer	
12	1	MI-03-0795	Pintle Hitch Adapter	

## STEP 1: REAR LEG / BAR

COMPONENTS		
ITEM NO	QTY	DESCRIPTION
1	1	Cart Body
8	2	5/16" Hex Bolt (2-1/4" L)
9	2	5/16" Lock Nut
10	1	Rear Leg / Bar

TOOLS		
1/2" Wrench & Socket		



1

Align the rear leg / bar onto the cart body. The longer leg should be toward the handles, the shorter leg should be toward the axle.



2

Insert a 5/16" bolt through the cart body and rear bar.



3

Secure into place using a 5/16" lock nut and a **1/2" wrench and socket**. Repeat steps 2 and 3 to secure the bar in place.

## STEP 2: WHEELS

COMPONENTS		
ITEM NO	QTY	DESCRIPTION
2	2	10" Plastic Hub Wheel
3	2	1-1/4" Cotter Pin
11	2	3/4" Washer

TOOLS		
Needle Nosed Pliers		



1

Slide the wheel onto the axle, making sure the offset side is facing inwards, toward the body of the cart.



2

Slide a washer onto the axle.



3

Then insert the cotter pin into the hole provided. Bend the cotter pin outward with a **needle nosed pilers**.

## STEP 3: ADJUSTABLE POST AND PINTLE HITCH ADAPTER

### STEP 1 COMPONENTS

ITEM NO	QTY	DESCRIPTION
4	1	2" Snap Pin
5	1	Extension Post
7	1	2" Trailer Ball
12	1	Pintle Hitch Adapter

### TOOLS

2" Wrench




1

Slide the extension post into the cart frame to the desired height and secure with a 2" snap pin.



2

If you're not using the pintle hitch adapter, store it on the snap pin.

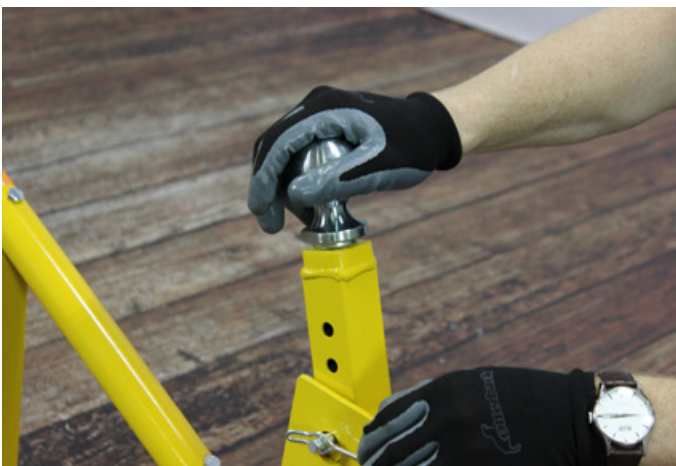

3

To install the pintle hitch adapter, unscrew the ball from the extension post



4

Align the pintle hitch adapter and screw the ball back into place.  
**You may need a 2" wrench to loosen / tighten the ball in place.**

**GRANITE INDUSTRIES**  
595 EAST LUGBILL ROAD  
877-447-2648  
SUPPORT@GRANITEIND.COM