



# **GLASS / DISH RACK, MILK CRATE & OVERSIZE MILK CRATE STORAGE CARTS**

*INSTRUCTION MANUAL*



67362, 67428, 67429

## CONTENTS

Specs .....	3
Parts Diagram .....	4
Assembly .....	5-10

## TOOLS NEEDED

- 1/2" Wrench / Socket
- 9/16" Wrench / Socket

## MADE IN THE USA GUARANTEE



Our American made products are engineered, manufactured and assembled in Archbold, OH using USA made steel.



*Expect more. get more.*  
FROM GRANITE INDUSTRIES

- Exceptional quality and service on every single product.
- Professional grade designs by our in house engineers.
- Industry leading warranties.
- Family owned and operated in the USA.

To view more products from  
American Cart & Rack  
scan the QR code with your phone  
or visit [AmericanCartAndRack.com](http://AmericanCartAndRack.com)



## WARRANTY

3 Year Limited Warranty. Carts, excluding any finishes, casters and wheels are warranted for three (3) years from date of original purchase. Casters and wheels are warranted for 90 days from date of original purchase. We will repair, without charge, any defect due to faulty material or workmanship. These warranties do not cover failures due to abuse, misuse, improper installation, accidental damage or when repairs or modifications have been made or attempted to be made by anyone other than Granite Industries. Any defective products that meet warranty specifications and Granite Industries approval, may be returned to the factory to be repaired or replaced free of charge. (Granite Industries will pay to ship replacement item(s) to the customer; however the customer is responsible for shipment of products to the factory.) This remedy is the sole remedy in contract, tort or otherwise, and Granite Industries is not liable for incidental, consequential or special damages. These warranties give you specific legal rights, and you may have other rights which vary from state to state. Should you have any questions, contact Granite Industries (Proof of purchase may be required).





**GRANITE  
INDUSTRIES**

**Customer Service**

**877-447-2648**

**M-F, 8am - 5pm EST**

## SPECS

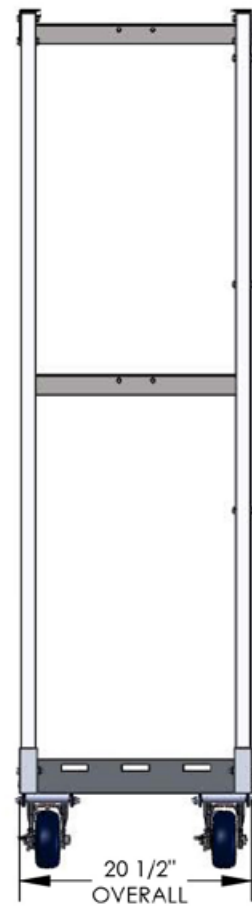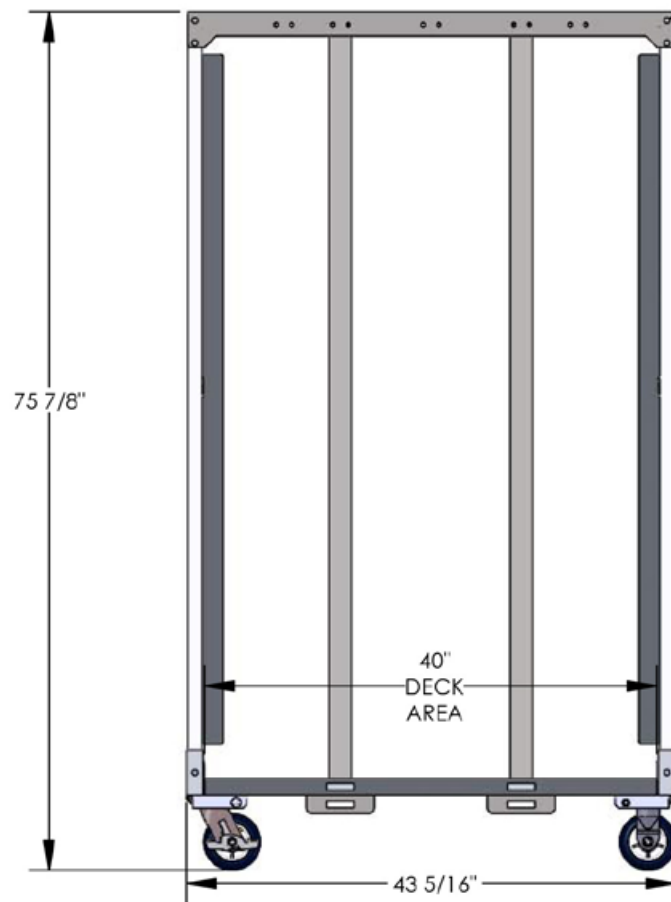


<b>Dimensions:</b>	<b>W:</b> 43"	<b>D:</b> 20.5"	<b>H:</b> 74"
<b>Interior:</b>	<b>W:</b> 40"	<b>D:</b> 20"	
<b>Weight:</b>	138 lb	<b>Capacity:</b>	1,500 lb

<b>Dimensions:</b>	<b>W:</b> 43"	<b>D:</b> 20.5"	<b>H:</b> 74"
<b>Interior:</b>	<b>W:</b> 40"	<b>D:</b> 20"	
<b>Weight:</b>	138 lb	<b>Capacity:</b>	1,500 lb

<b>Dimensions:</b>	<b>W:</b> 43"	<b>D:</b> 20.5"	<b>H:</b> 74"
<b>Interior:</b>	<b>W:</b> 40"	<b>D:</b> 20"	
<b>Weight:</b>	138 lb	<b>Capacity:</b>	1,500 lb


## PARTS DIAGRAM - 67362 DISH RACK STORAGE CART

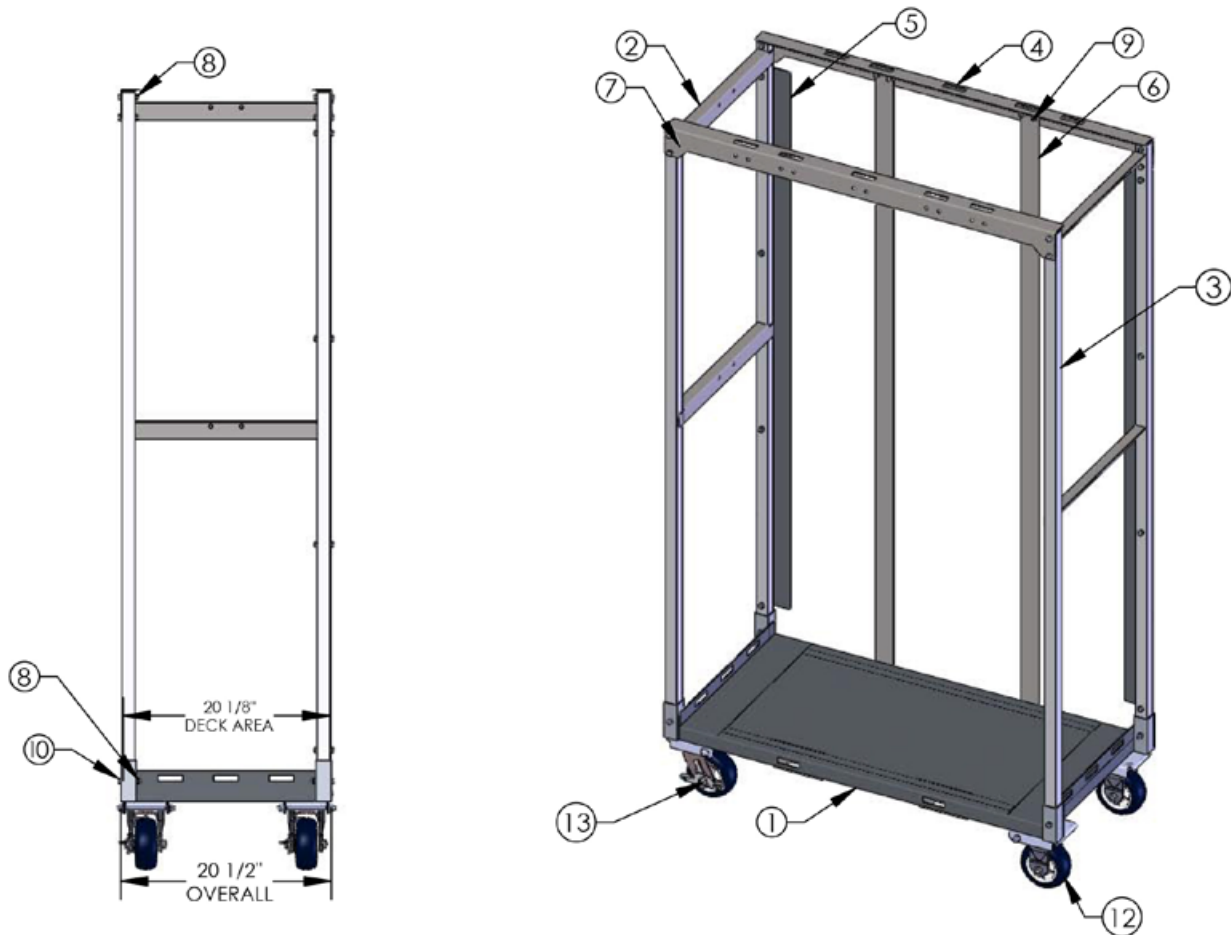

<b>Dimensions:</b>	<b>W:</b> 43"	<b>D:</b> 20.5"	<b>H:</b> 74"
<b>Interior:</b>	<b>W:</b> 40"	<b>D:</b> 20"	
<b>Weight:</b>	138 lb	<b>Capacity:</b>	1,500 lb

ITEM NO	QTY	PART NO	DESCRIPTION	
1	1	MI-12-5652	Base	
2	1	MI-12-5654	Left End	
3	1	MI-12-5873	Right End	
4	2	MI-08-1616	Top Brace	
5	2	MI-07-0514	Rear Guard (3" W x 60 1/2" L)	
6	2	MI-07-0515	Rear Vertical Panel (2" W x 68 7/8" L)	
7	16	PI-01-0091	5/16"x 1-3/4" L Hex Bolt	Use a 1/2" wrench / socket
8	28	PI-01-0017	5/16" Locknut	Use a 1/2" wrench / socket
9	8	PI-01-0189	5/16" x 3/4" L Hex Bolt	Use a 1/2" wrench / socket
10	4	PI-01-0152	5/16" x 2" L Hex Bolt	Use a 1/2" wrench / socket
11	2	PI-11-0212	E-Track Ratchet Strap 2"x12'	
12	2	PI-06-0037	5" Fixed Caster	
13	2	PI-06-0089	5" Swivel Caster	
---	4	---	3/8" x 5" Carriage Bolt	
---	4	---	3/8" Lock Nut	Use a 9/16" wrench / socket


## PARTS DIAGRAM - 67428 MILK CRATE STORAGE CART

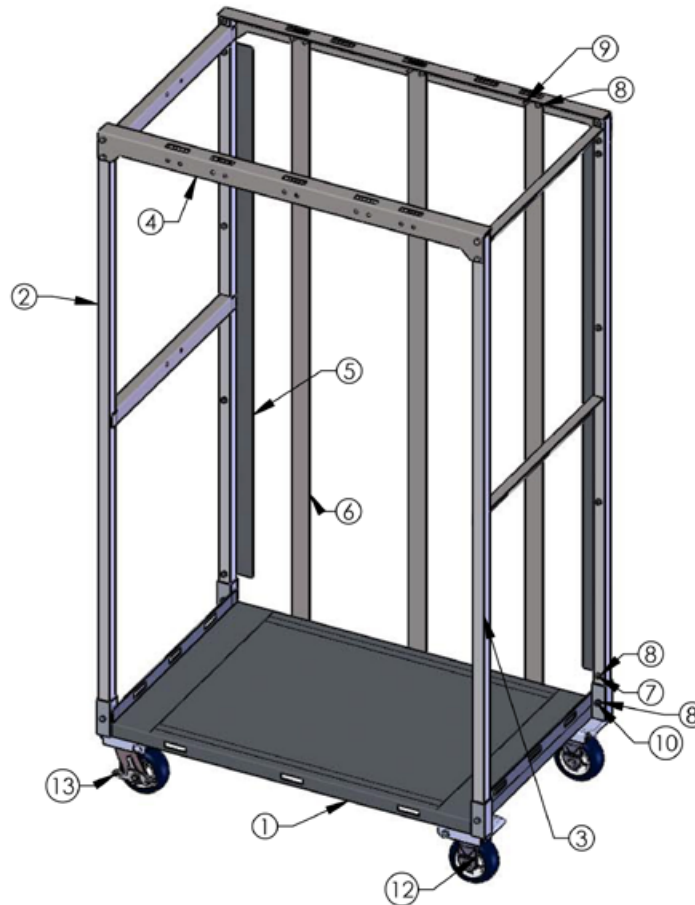

<b>Dimensions:</b>	<b>W:</b> 43"	<b>D:</b> 20.5"	<b>H:</b> 74"
<b>Interior:</b>	<b>W:</b> 40"	<b>D:</b> 20"	
<b>Weight:</b>	138 lb	<b>Capacity:</b>	1,500 lb

ITEM NO	QTY	PART NO	DESCRIPTION	
1	1	MI-12-6030	Base	
2	1	MI-12-6031	Left End	
3	1	MI-12-6032	Right End	
4	2	MI-08-1616	Top Brace	
5	2	MI-07-0514	Rear Guard (3" W x 60 1/2" L)	
6	2	MI-07-0515	Rear Vertical Panel (2" W x 68 7/8" L)	
7	16	PI-01-0091	5/16"x 1-3/4" L Hex Bolt	Use a 1/2" wrench / socket
8	28	PI-01-0017	5/16" Locknut	Use a 1/2" wrench / socket
9	8	PI-01-0189	5/16" x 3/4" L Hex Bolt	Use a 1/2" wrench / socket
10	4	PI-01-0152	5/16" x 2" L Hex Bolt	Use a 1/2" wrench / socket
11	2	PI-11-0212	E-Track Ratchet Strap 2"x12'	
12	2	PI-06-0037	5" Fixed Caster	
13	2	PI-06-0089	5" Swivel Caster	
---	4	---	3/8" x 5" Carriage Bolt	
---	4	---	3/8" Lock Nut	Use a 9/16" wrench / socket

## PARTS DIAGRAM - 67429 OVERSIZE MILK CRATE STORAGE CART

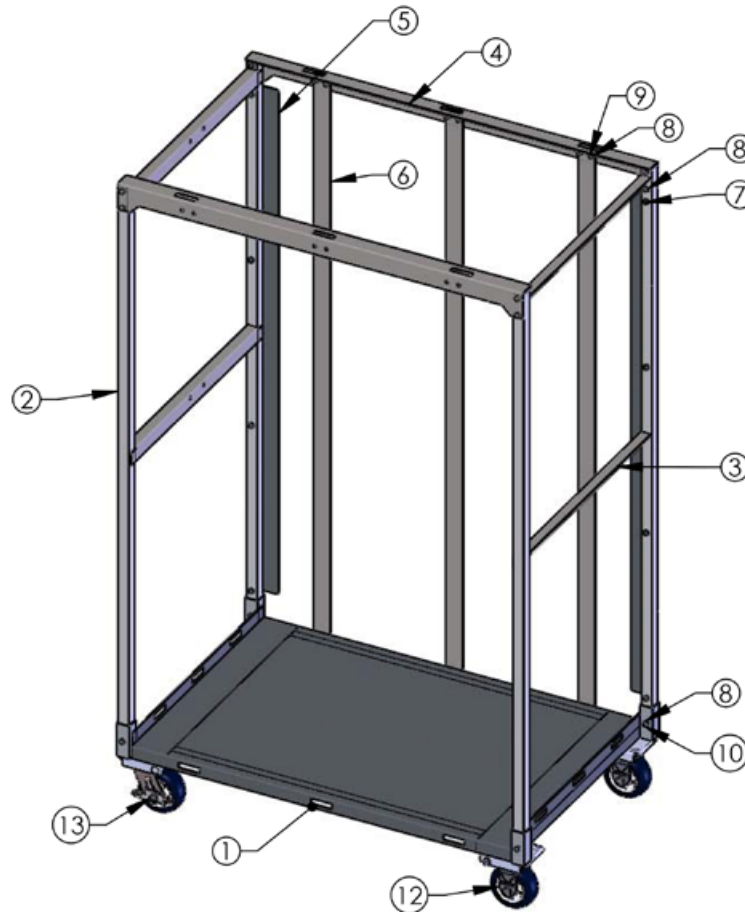

<b>Dimensions:</b>	<b>W:</b> 43"	<b>D:</b> 20.5"	<b>H:</b> 74"
<b>Interior:</b>	<b>W:</b> 40"	<b>D:</b> 20"	
<b>Weight:</b>	138 lb	<b>Capacity:</b>	1,500 lb

ITEM NO	QTY	PART NO	DESCRIPTION	
1	1	MI-12-6033	Base	
2	1	MI-12-6034	Left End	
3	1	MI-12-6035	Right End	
4	2	MI-08-1831	Top Brace	
5	2	MI-07-0514	Rear Guard (3" W x 60 1/2" L)	
6	2	MI-07-0515	Rear Vertical Panel (2" W x 68 7/8" L)	
7	16	PI-01-0091	5/16" x 1-3/4" L Hex Bolt	Use a 1/2" wrench / socket
8	28	PI-01-0017	5/16" Locknut	Use a 1/2" wrench / socket
9	8	PI-01-0189	5/16" x 3/4" L Hex Bolt	Use a 1/2" wrench / socket
10	4	PI-01-0152	5/16" x 2" L Hex Bolt	Use a 1/2" wrench / socket
11	2	PI-11-0212	E-Track Ratchet Strap 2"x12'	
12	2	PI-06-0037	5" Fixed Caster	
13	2	PI-06-0089	5" Swivel Caster	
---	4	---	3/8" x 5" Carriage Bolt	
---	4	---	3/8" Lock Nut	Use a 9/16" wrench / socket



## STEP 1: BASE AND END PIECES

COMPONENTS		
ITEM NO	QTY	DESCRIPTION
1	1	Base
2	1	Left End
12	1	Right End
10	4	5/16" x 2" Hex Bolt
8	4	5/16" Locknut


  

TOOLS		
1/2" Wrench		
1/2" Socket		



1

Note the front of the cart base has rectangular holes for the E-Track Ratchet System.

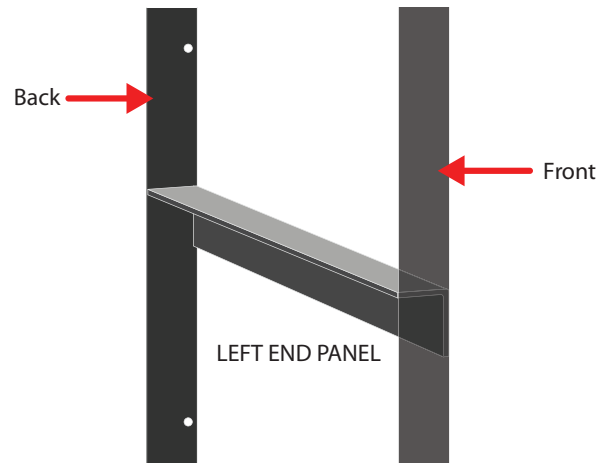

2

There is a right and a left end panel. These are not interchangeable. The back side of the end panels have 7 holes. This should go towards the back of the cart base.



3

Insert the left end into the left side of the cart base. Repeat for the right side.



4

Insert 5/16" x 2" hex bolts (2 total) through the cart base and left end panel. Finger tighten into place. Fully tighten with a 1/2" wrench and socket. Repeat for the right side.



#### CHECK POINT

Your cart should look like this.  
If so, continue onto the next step.

Make sure the back vertical posts of the side panels have the extra holes.

The front of the cart base should have the E-Track slots.



## STEP 2: TOP BRACES

COMPONENTS		
ITEM NO	QTY	DESCRIPTION
4	2	Top Brace
7	8	5/16"x 1-3/4" L Hex Bolt
8	8	5/16" Locknut

TOOLS		
1/2" Wrench		
1/2" Socket		



**1** Align the top brace with the holes at the top of the end panels.



**2** Insert 5/16"x 1-3/4" L hex bolt through the brace and end panels. Finger tighten a 5/16" locknut into place. Do this for all 4 holes of the top brace.



**3** Fully tighten with a 1/2" wrench and socket. Repeat steps 1-3 for the other top brace.



**✓ CHECK POINT**  
Your cart should look like this. If so, continue onto the next step.

## STEP 3: REAR GUARDS

COMPONENTS		
ITEM NO	QTY	DESCRIPTION
5	2	Rear Guard (3" W x 60 1/2")
7	8	5/16"x 1-3/4" L Hex Bolt
8	8	5/16" Locknut

TOOLS	
1/2" Wrench	
1/2" Socket	



1

Align the rear guard over the 4 holes on the back side of the cart.



2

Insert a 5/16"x 1-3/4" L hex bolt through the guard and the end panel. Finger tighten a 5/16" lock nut into place. Do this for all 4 holes on the rear guard.



3

Fully tighten with a 1/2" wrench and socket. Repeat steps 1-3 for the other rear guard.



### CHECK POINT

Your cart should look like this. If so, continue onto the next step.



## STEP 4: REAR VERTICAL PANEL

COMPONENTS		
ITEM NO	QTY	DESCRIPTION
6	2	Rear Vertical Panel (2" W x 68 7/8" L)
7	8	5/16"x 1-3/4" L Hex Bolt
8	8	5/16" Locknut

TOOLS	
1/2" Wrench	
1/2" Socket	



1

Lay the cart face down, so the back side is facing upward.



2

Insert a 5/16"x 1-3/4" L hex bolt through the rear vertical panel and the cart base. Finger tighten a 5/16" lock nut into place. Do this for all 4 holes on the rear vertical panel.



3

Fully tighten with a 1/2" wrench and socket. Repeat steps 1-3 for the other rear vertical panel.



### CHECK POINT

Your cart should look like this. If so, continue onto the next step.

## STEP 5: CASTERS


COMPONENTS		
ITEM NO	QTY	DESCRIPTION
12	2	5" Fixed Caster
13	2	5" Swivel Caster
--	4	3/8" x 5" Carriage Bolt
--	4	3/8" Lock Nut
TOOLS		
9/16" Wrench		
9/16" Socket		



**1** While the cart is still face down, insert a fixed caster into the caster mount on your left side. Insert the second fixed caster in the mount directly below.



**2** Insert one of the 5" carriage bolts through the caster mount. Finger tighten a 3/8" lock nut to secure the caster in place. Fully tighten with a 9/16" wrench and socket.

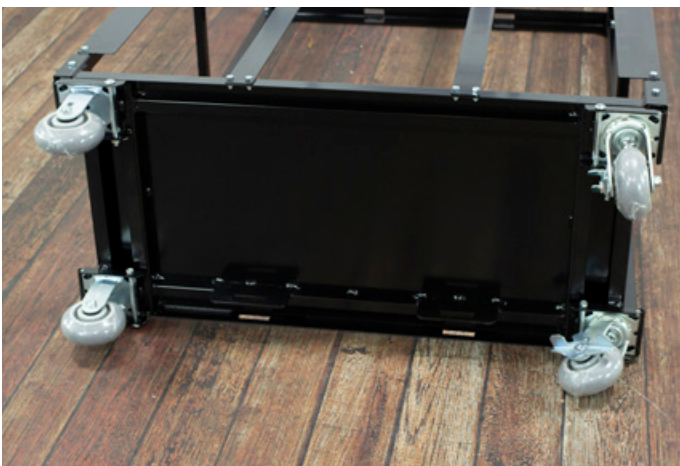

**3** Repeat steps 1 and 2, attaching the swivel casters to the caster mounts on your right side. Once finished, set your cart upright.



Congratulations!  
Your glass / dish rack storage cart  
is fully assembled.