



DROP DECK DRYWALL CART

INSTRUCTION MANUAL



75132

CONTENTS

Specs	3
Parts Diagram	4
Assembly	5

TOOLS NEEDED

- 9/16" Wrench
- Ratchet with 9/16" Socket
- Box Cutters / Utility Knife

MADE IN THE USA GUARANTEE



Our American made products are engineered, manufactured and assembled in Archbold, OH using USA made steel.



Expect more. get more.
FROM GRANITE INDUSTRIES

- Exceptional quality and service on every single product.
- Professional grade designs by our in house engineers.
- Industry leading warranties.
- Family owned and operated in the USA.

To view more products from
American Cart & Rack
scan the QR code with your phone
or visit AmericanCartAndRack.com



WARRANTY

3 Year Limited Warranty. Carts, excluding any finishes, casters and wheels are warranted for three (3) years from date of original purchase. Casters and wheels are warranted for 90 days from date of original purchase. We will repair, without charge, any defect due to faulty material or workmanship. These warranties do not cover failures due to abuse, misuse, improper installation, accidental damage or when repairs or modifications have been made or attempted to be made by anyone other than Granite Industries. Any defective products that meet warranty specifications and Granite Industries approval, may be returned to the factory to be repaired or replaced free of charge. (Granite Industries will pay to ship replacement item(s) to the customer; however the customer is responsible for shipment of products to the factory.) This remedy is the sole remedy in contract, tort or otherwise, and Granite Industries is not liable for incidental, consequential or special damages. These warranties give you specific legal rights, and you may have other rights which vary from state to state. Should you have any questions, contact Granite Industries (Proof of purchase may be required).





**GRANITE
INDUSTRIES**

Customer Service

877-447-2648


M-F, 8am - 5pm EST

SPECS

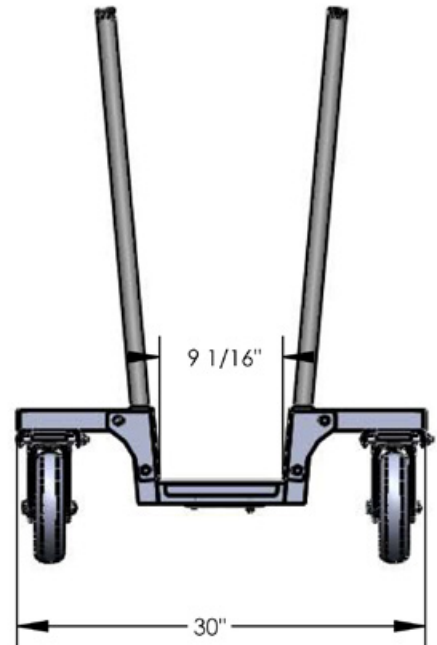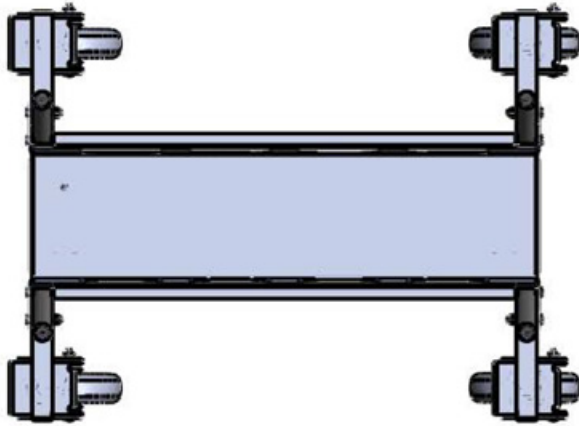

Overall Dimensions:	W: 42.5"	D: 29.75"	H: 41"
Bed:	W: 9"	Poles:	L: 39"
Weight:	72 lb	Capacity:	3,000 lb

PARTS DIAGRAM

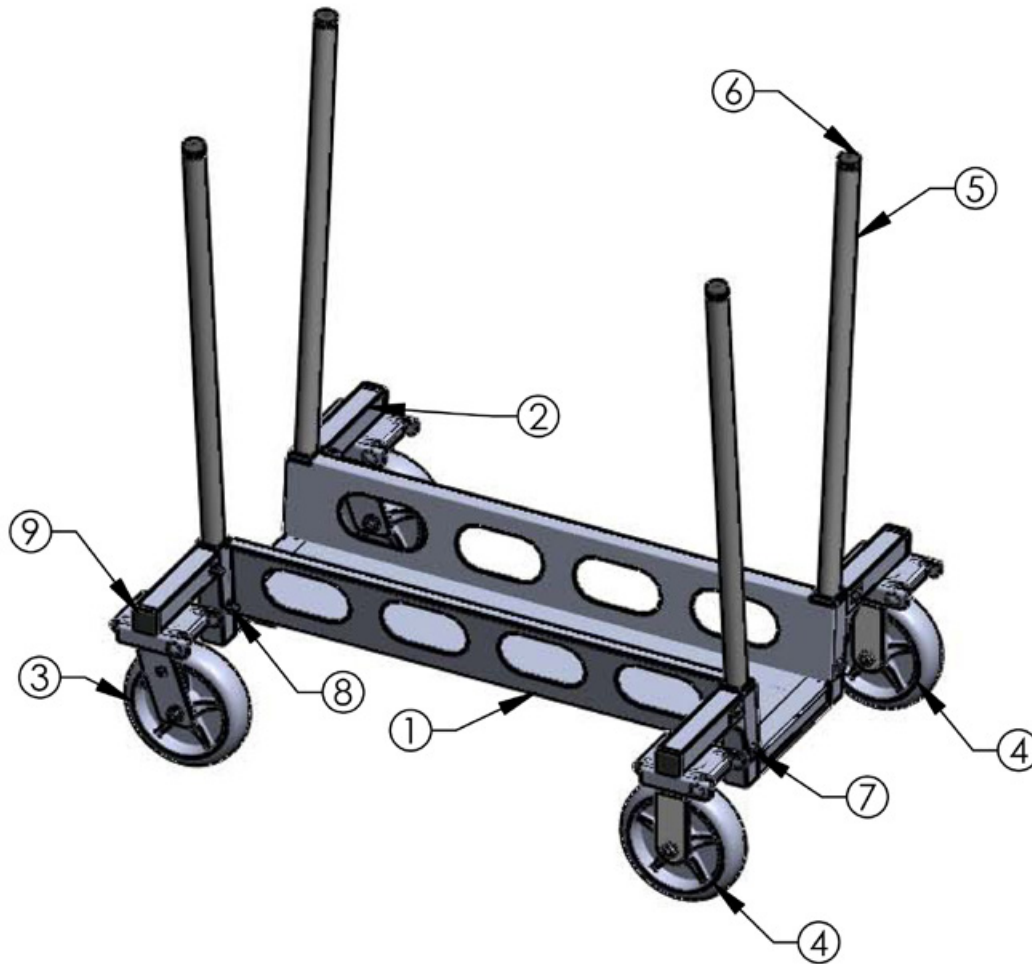

ITEM NO	QTY	PART NO	DESCRIPTION	
1	1	MI-08-1869	Cart Body	
2	2	MI-12-6089	Cart End Bracket	
3	2	PI-06-0004	8" Swivel Drywall Caster	
4	2	PI-06-0038	8" Fixed Drywall Caster	
5	4	MI-01-6796	Posts	
6	4	PI-04-0036	Cap Plug 1 1/4" diameter	
7	8	PI-01-0080	3/8" Hex Bolt x 2 1/4" L	Use 9/16" Wrench/Socket
8	8	PI-01-0019	3/8" Locknut	Use 9/16" Wrench/Socket
9	4	PI-04-0039	Cap Plug 1 1/2"	
10	16	PI-01-0030	3/8" Washer	
11	1	MI-08-1939	Pole Storage Bracket	
12	1	MI-08-1940	Pole Storage Bracket	
13	1	MI-03-0047	Swing Bar for Pole Storage Bracket MI-08-1939	
14	1	PI-01-0018	Carriage Bolt 5/16" x 3/4"	
15	1	PI-01-0017	Nylon Locknut 5/16"	
16	4	PI-01-0424	Screw 3/4" Slotted Hex Washer	
	4	n/a	Carriage Bolt 3/8" x 5"	Use 9/16" Wrench/Socket
	4	n/a	3/8" Hex Nut	Use 9/16" Wrench/Socket

STEP 1: CART BODY ASSEMBLY


COMPONENTS		
ITEM NO	QTY	DESCRIPTION
1	1	Cart Body
2	2	Cart End Bracket
7	8	3/8" Hex Bolt x 2 1/4" L
8	8	3/8" Locknut
10	16	3/8" Washer

TOOLS		
9/16" Wrench		
9/16" Socket		



1

Take one of the frame ends and slide the body down onto the frame. Make sure the pole storage pockets are facing inward.

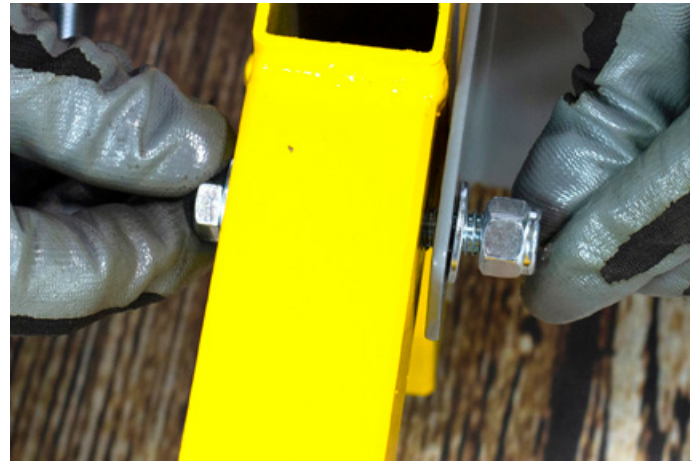

2

Insert a washer onto a bolt. Then slide the bolt through the cart body and end frame. Install a second washer and then a lock nut. Finger tighten in place.



3

Once all four bolts are installed and finger tightened in place, completely tighten them down with a 9/16" wrench and a 9/16" socket.



4

Repeat steps 1-3 to install the other frame end to the cart body.

STEP 2: INSTALL CASTERS

COMPONENTS		
ITEM NO	QTY	DESCRIPTION
-	4	3/8" x 5" Carriage Bolt
-	4	3/8" Hex Nut
3	2	8" Swivel Drywall Caster
4	2	8" Fixed Drywall Caster
TOOLS		
9/16" Wrench or Socket		




1

Flip the cart upside down. Install the caster by sliding it under the hook end of the caster mount. Set the caster down into place.



2

Insert a carriage bolt through the holes in the caster mount to secure your caster in place.

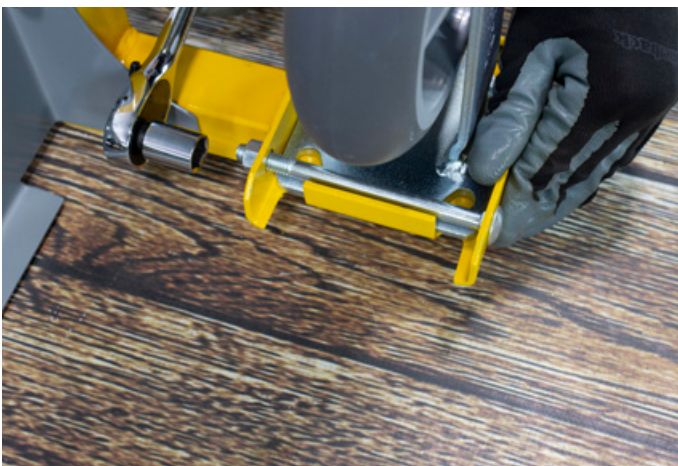

3

Install a 3/8" hex nut. Tighten down using a 9/16" socket. Repeat steps 1-3 for the remaining casters. Be sure to install both fixed casters on one end, and both swivel casters on the opposite end.



Drop the poles in place, and your drywall cart is now fully assembled.

NOTES:

[illegible]



GRANITE INDUSTRIES
595 EAST LUGBILL ROAD
877-447-2648
SUPPORT@GRANITEIND.COM